

## HVP349 SERIES



### 350 Watt 12VDC Output Model

- 9.45 x 2.15 x 1.57" Hot-Swap Package

#### Features:

- Universal AC Input Range (90-264 VAC)
- Active Power Factor Correction (0.98 PF Typical)
- Hot-Swap / N+1 Redundant Operation
- Analog / I<sup>2</sup>C / PMBus Interface for Status & Control
- Front Panel LED Indicators
- Class B Emissions
- 2 Year Warranty

#### INPUT:

Input Voltage	90~264 VAC (Universal AC Input)
Input Frequency	47-63Hz
Inrush Current	54Arms @ 230 VAC Cold Start
Input Current	3.4 / 1.74A @ 115 / 230 VAC
Input Protection	Single Fuse
Hold-Up Time	8ms Minimum @ 115 VAC Minimum
Leakage Current	<800 $\mu$ A @ 230 VAC Maximum
Power Factor	EN61000-3-2 (0.99 PF Typical)
No Load power	8 Watt Typical

#### GENERAL:

Efficiency	Up to 91.6% (see 80 Plus test, page 3)
Operating Temperature	-10-70°C, derate linearly to 60% load at 50-70°C
Storage Temperature	-40°C to +85°C
Over-Temp Protection	Auto-Recovery
Cooling	Internal Ball Bearing Fans
Operating Humidity	5-90% RH, Non-Condensing
Vibration	5 ~ 50 Hz, acceleration 7.35 m/s*s on X,Y and Z Axis
MTBF	>100k Hrs (according to MIL-HBK-217F) at 30°C

#### OUTPUT:

Adjustment Range	Via I <sup>2</sup> C / RxTx Interface
Minimum Load	none required
Line Regulation	$\pm$ 1%
Load Regulation	$\pm$ 1% (5VSB = $\pm$ 5%)
Ripple & Noise	$\pm$ 1% pk-pk @ 20MHz
Overload Protection	120-135% of max power (Foldback)
Over Voltage	Latching before 130% of nominal
Short Circuit Protection	Trip without damage & auto-recovery
Transient Response	recovers <2ms following a 25% load change
Switching Frequency	55KHz

#### APPROVALS:

Emissions	EN55022 "B", FCC Part 15 Subject J Class B
Safety Approvals	IEC 60950-1 Class I

#### STATUS / CONTROL:

5VSB	500mA (Always present and on)
DC Okay	Active Low
Fan Fail	Active Low
Enable	Active Low to Enable
P/S Present	Pull to Low
Current Share	V1 Only
AC Fail	Active Low


## HVP349 SERIES

### Output Specifications:



Model:	V1	I <sub>out</sub>	V2	I <sub>out</sub>
HVP349-D120E	+12V	29.1A	+5VSB	0.5A

\* Maximum Output Power <350 Watts

### Mechanical Dimensions:

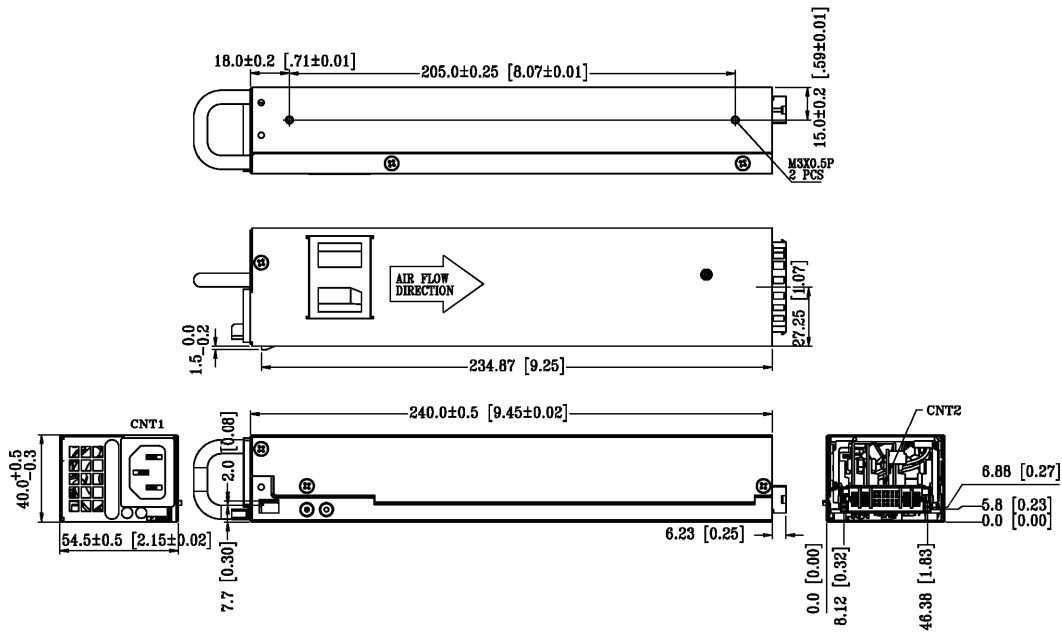

### DERATING CHART

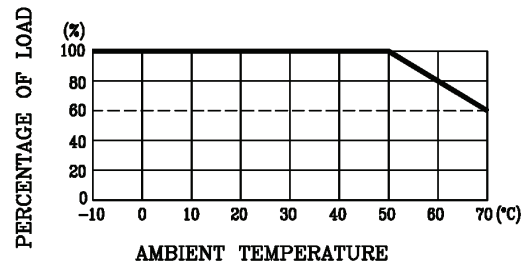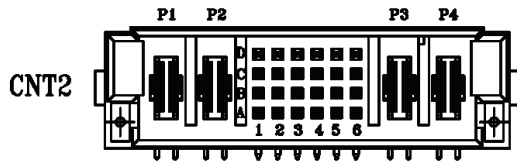

### INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

CNT1			CNT2									
L	N	G	P1	P2	D1	D2	D3	D4	D5	D6	P3	P4
LINE	NEUTRAL	GND	VO1	COM	Albet	A2	DGND	5VSB	N/A	N/A	N/A	N/A
					C1	C2	C3	C4	C5	C6		
					PS_PRNT	A1	PS_EN_IN	DCOK_12V_L	N/A	N/A		
					B1	B2	B3	B4	B5	B6		
					12V_CS	A0	PS_EN_OUT	N/A	N/A	N/A		
					A1	A2	A3	A4	A5	A6		
SCL	SDA	AC_FAIL	FAN_FAL	N/A	N/A							

## HVP349 SERIES


### 80 PLUS Verification and Testing Report

TYPICAL EFFICIENCY (50% Load):	91.61%
AVERAGE EFFICIENCY:	90.17%
80 PLUS COMPLIANT:	YES



Input Current and Voltage Waveforms

Manufacturer	HiTRON Electronic Corporation
Moder Number	HVP349-D120E
Serial Number	N/A
Year	2012
Type	1U
Test Date	7-Jun-12

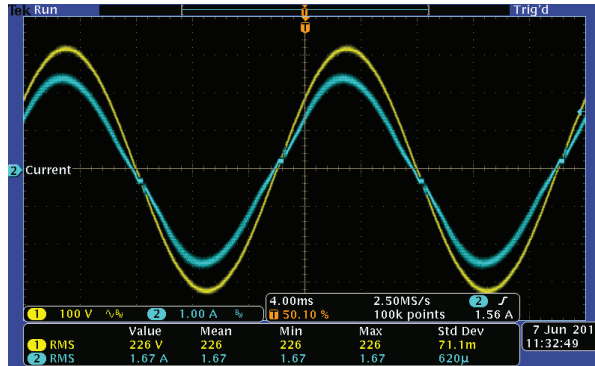

Rated Specifications	Value	Units
Input Voltage	100-240	Volts
Input Current	1.7	Amps
Input Frequency	50-60	Hz
Rated Output Power	352.5	Watts

Note: All measurements were taken with input voltage at 230V nominal and 50 Hz

Input AC current Waveform (I<sub>RMS</sub> = % , 100% Load)

I <sub>RMS</sub> A	PF	I <sub>THD</sub> %	Load %	Fraction of Load	Input Watts	Interbal Fan Power (W)	DC Terminal Voltage(V) / DC Load Current (A)					Output Watts	Efficiency %
							12V	5Vsb	N/A	N/A	N/A		
0.2886	0.669	17.07	*10%	Low	44.5	0.8	12V / 2.5	5V / 0.05				35.33	81.19%
0.4385	0.8102	17.49	20%	Light	81.7	0.8	12V / 5	5V / 0.1				70.73	87.55%
0.8642	0.9723	9.57	50%	Typical	193.3	1.3	12V / 12.5	5V / 0.25				175.78	91.61%
1.6845	0.9904	4.91	100%	Full	384.1	2.2	12V / 25	5V / 0.5				348.62	91.34%

\* 10% load results are for informative purposes only and not included in certification requirements.

\*\* Fan power should be recorded if Fan exists, but is not included in the efficiency calculations.

